

LINDNER



**URRACO 95
MOBILE SHREDDING**

**THE MEASURE
OF ALL THINGS.**

ONLY LINDNER CLIENTS CAN TRULY SAY:

LEAVES EVERYTHING IN THE DUST.



1. ROBUST TWIN-ROTOR CUTTING SYSTEM

Incredibly productive thanks to aggressive intake and synchronous running of the shafts.

Maximum resistance with our welded crushers, rippers, scrapers and breaker bars.

Adapts perfectly to the material thanks to shaft pairs available in different designs.



2. POWERFUL DIESEL ENGINE

Efficient shredding with our 770 hp diesel engine from Scania.

Complies with all exhaust gas regulations thanks to our state-of-the-art SCR system.

Particularly long service life ensured by an ideal interaction between the engine and the hydraulics.




3. PROVEN MOBILE HYDRAULICS

High output thanks to the self-regulating hydrostatic double drive.


Effective shredding with a torque of up to 480,000 Nm and robust planetary gears.

Safe operation owing to the lightning speed automatic detection of non-shreddables.

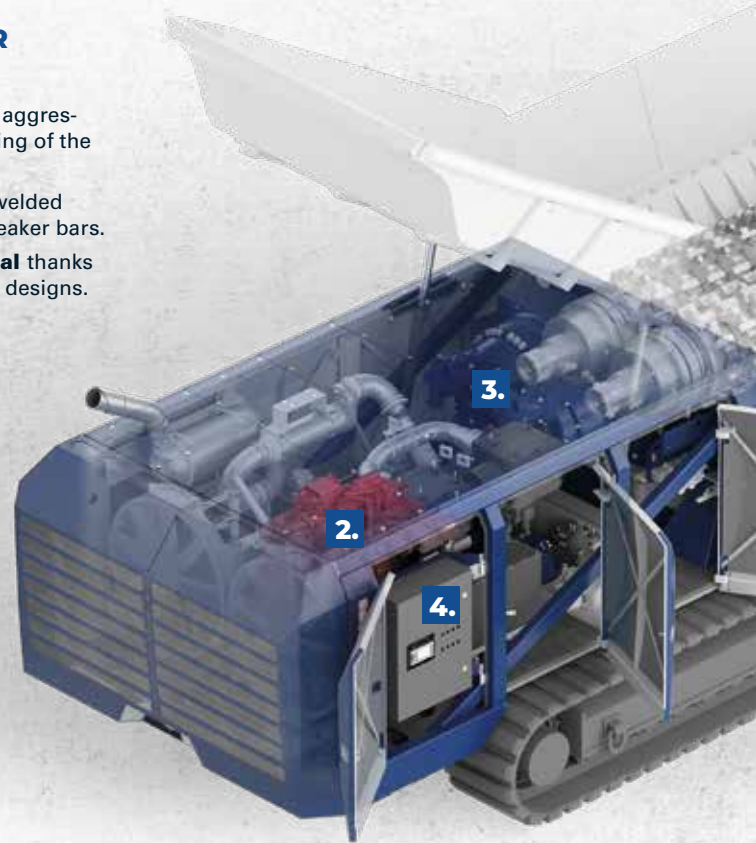

TAKES MOBILE SHREDDING TO THE EXTREME: MAXIMUM OUTPUT, FULL MOBILITY.

Thanks to its extremely powerful engine, long shaft length and aggressive intake, the twin-shaft Urraco 95 DK shredder makes short work of every material. Extremely efficient and reliable with low wear and tear, this machine is maintenance-friendly and has a low rate of energy consumption per tonne of shredded material.

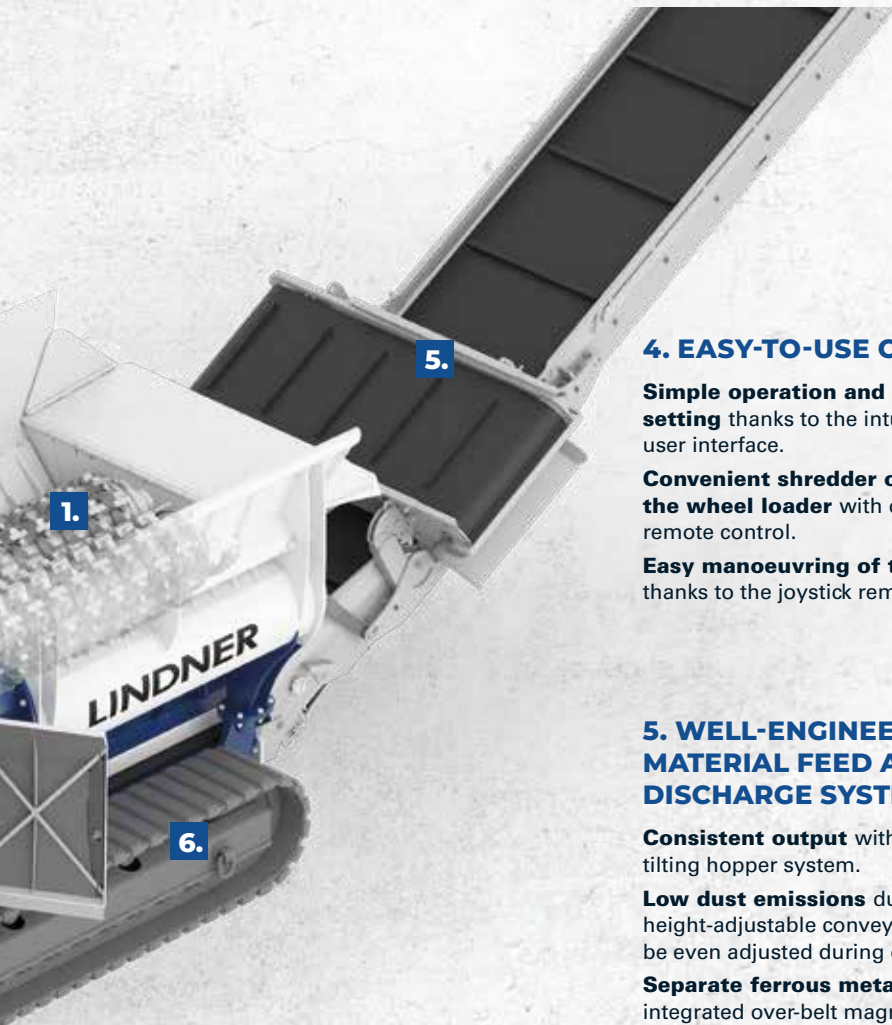

4. EASY-TO-USE CONTROL

Simple operation and parameter-setting thanks to the intuitive touchscreen user interface.

Convenient shredder operation from the wheel loader with our customisable remote control.

Easy manoeuvring of the shredder thanks to the joystick remote control.



5. WELL-ENGINEERED MATERIAL FEED AND DISCHARGE SYSTEMS

Consistent output with our smart double tilting hopper system.

Low dust emissions due to hydraulic height-adjustable conveyor belt, which can be even adjusted during operation.

Separate ferrous metals with optional integrated over-belt magnet.



6. ROBUST TRACKED CHASSIS


Independent manoeuvring of the machine thanks to hydraulic crawler tracks.

Secure hold and anchoring for maximum stability in operation.

Optional rubber pads are available for gentle operation on tarmacked areas.



TECHNICAL DATA

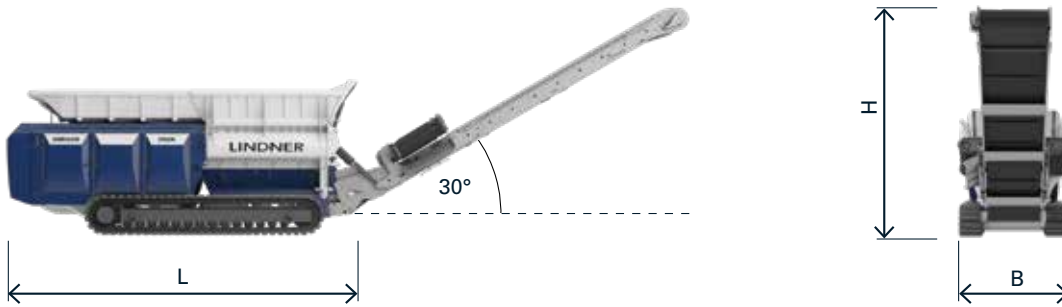

URRACO 95DK

Drive Power Diesel	hp	770
Exhaust Gas Standard		- / USTier 4f
Type		Track
Shaft Length	mm	2 x 2500
Max. Torque	Nm	480.000
Total Weight	t	42
Measure (LxBxH)	mm	9200 x 3000 x 3200
Discharge Height (30°)	mm	5500

*The stated values refer to standard machine versions with a standard hopper and raised feet. The right to make technical changes is reserved.

SHAFTS FINE

The specialist for the fine grain



Output: 100 – 200 mm

Waste wood A1 – A2
Biomass
Green cuttings
Rootstocks
Paper rolls
Tarpaper
Plastics
etc.

SHAFTS ROUGH

The specialist for the rough stuff



Output: 300 – 500 mm

Waste wood A1 – A4
Household refuse
Bulky commercial
Waste
Rootstocks
Railway sleepers
Metals
Light iron scrap
Light aluminium scrap
Electronic scrap
etc.



Magnetic separator of
ferrous material



Water sprinkling system



engine compartment
extinguishing system



Extended wear protection

Lindner-Recyclingtech GmbH

Villacher Straße 48 | 9800 Spittal/Drau | Austria

t.: +43 4762 2742 | f.: +43 4762 2742-9032 | office@l-rt.com

www.l-rt.com